



检测报告

TEST REPORT

委托单位: 苏州阿特斯阳光电力科技有限公司

Client

单位地址: 苏州高新区鹿山路 199 号

Address

检测类别: 验收检测

Type



编制:

Compiled by

张宇红

一 审:

Inspected by

俞斌

二 审:

Inspected by

朱艳菊

批 准:

Approved by

顾

江苏国测检测技术有限公司

China Test (Jiangsu) Testing Technology CO., Ltd

2018 年 09 月 12 日

Y M D



报 告 说 明

Report Statement

- 1、报告无“检测专用章”或检测单位公章无效。
Report without “Test Dedicated Seal” or without the detection unit official seal is invalidated.
- 2、复制报告未重新加盖“检测专用章”或检测单位公章无效。
Copy report without re-stamped “Test Dedicated Seal” is invalidate.
- 3、报告无编制、审核、批准人签字无效。
Report without compilation, audit and approval signature is invalidated.
- 4、报告涂改无效。
Altered report is invalidated.
- 5、对检测报告若有异议，应于收到报告之日起十日内向检测单位提出，逾期不予受理。
The objections to the inspection report shall be raised to the testing unit within ten days overdue inadmissible.
- 6、本报告检测结果仅对被测地点、对象及当时情况有效，送样委托检测结果仅对所送委托样品有效。
This report is effective only to the inspected location, the object and the particular situation while inspecting, the sample test result is validated only to the commissioned sample.
- 7、除客户特别申明并支付样品管理费，所有超过标准规定时效期的样品均不再做留样。
Only if the client makes particular statement and pays the management fess of the test samples, the rest testing samples will not be kept after exceeding the standard provisions of the limitation period.
- 8、除客户特别申明并支付档案管理费，本次检测的所有记录档案保存期限为六年。
Only if customer makes particular statement and pays the archives management fee, all files or archives related to this inspection report will only be kept up to 6 years.
- 9、部分复印无效。
Part of the copy is invalid .
- 10、客户提供的信息和指定检测内容不符合规范的情况，我司概不负责。
We are not responsible for the information provided by the customer and the specified content that does not conform to the specification.

检测报告

Test Report

受检单位 Applicant	苏州阿特斯阳光电力科技有限公司		
地 址 Address	苏州高新区鹿山路 199 号		
联系人 Contact person	张宇清	联系电话 Contact number	13776023359
样品类别 Sample type	废气	采样人 Mining kind of people	刘勇、宋晓平、王杰、董书敏
采样日期 Sampling Date	2018 年 08 月 08 日-2018 年 08 月 20 日	分析日期 Analysis Date	2018 年 08 月 08 日-08 月 25 日
检测目的 Test objective	验收检测		
检测内容 Test content	颗粒物		
检测仪器 Testing instrument	崂应 2050 型空气/智能 TSP 综合采样器 (GCM-262、263、264、271、290、291、292、293、294、295、296、297)、PH-SD2 手持风速风向仪 (GCM-076)、FA1004 电子天平 (EAA51)、BT25S 电子天平 (EAA-01)		
检测依据及方法 Test basis and method	颗粒物: GB/T 15432-1995 环境空气 总悬浮颗粒物的测定 重量法 颗粒物: HJ 836-2017 固定污染源废气 低浓度颗粒物的测定 重量法		
检测结果 Test Result	详见第 4-5 页		
备 注 Remark	/		

检测报告

Test Report

排气筒名称 及监测时间	检测项目	计量单位	第 1 次	第 2 次	第 3 次	第 4 次	平均值	
污泥烘干排气筒 (出口) 2018.08.19	排气筒高度	m	15	15	15	15	/	
	烟气温度	°C	53	53	53	54	/	
	废气流速	m/s	7.2	6.9	7.0	7.0	/	
	废气量	Nm ³ /h	5937	5716	5791	5782	5827	
	颗粒物	排放浓度	mg/Nm ³	8.2	11.8	7.7	7.0	8.7
		排放速率	kg/h	4.9×10 ⁻²	6.74×10 ⁻²	4.5×10 ⁻²	4.0×10 ⁻²	5.1×10 ⁻²
污泥烘干排气筒 (出口) 2018.08.20	排气筒高度	m	15	15	15	15	/	
	烟气温度	°C	54	54	54	54	/	
	废气流速	m/s	7.1	7.3	7.0	7.1	/	
	废气量	Nm ³ /h	5859	6004	5711	5853	5840	
	颗粒物	排放浓度	mg/Nm ³	8.1	7.1	5.7	5.9	6.7
		排放速率	kg/h	4.7×10 ⁻²	4.3×10 ⁻²	3.3×10 ⁻²	3.5×10 ⁻²	3.9×10 ⁻²
备注	/							


检测报告

Test Report

项目及监测 时间 测点 频次	2018.08.08 颗粒物 (mg/Nm ³)				2018.08.09 颗粒物 (mg/Nm ³)			
	第 1 次	第 2 次	第 3 次	第 4 次	第 1 次	第 2 次	第 3 次	第 4 次
上风向①	0.112	0.094	0.114	0.095	0.112	0.094	0.112	0.113
下风向②	0.299	0.320	0.303	0.302	0.318	0.301	0.304	0.302
下风向③	0.318	0.282	0.322	0.283	0.280	0.282	0.285	0.284
下风向④	0.280	0.301	0.284	0.321	0.299	0.319	0.323	0.322
风速 (m/s)	2.2	2.1	2.1	2.2	2.2	2.2	2.1	2.2
气温 (°C)	31.6	33.3	36.5	35.0	31.2	33.6	35.6	34.8
气压 (kPa)	100.8	100.8	100.7	100.7	100.7	100.7	100.7	100.7
相对湿度 (%)	57	56	56	57	58	58	57	57
风向	南风	南风	南风	南风	南风	南风	南风	南风

备注: /

无组织废气厂界监测点示意图:

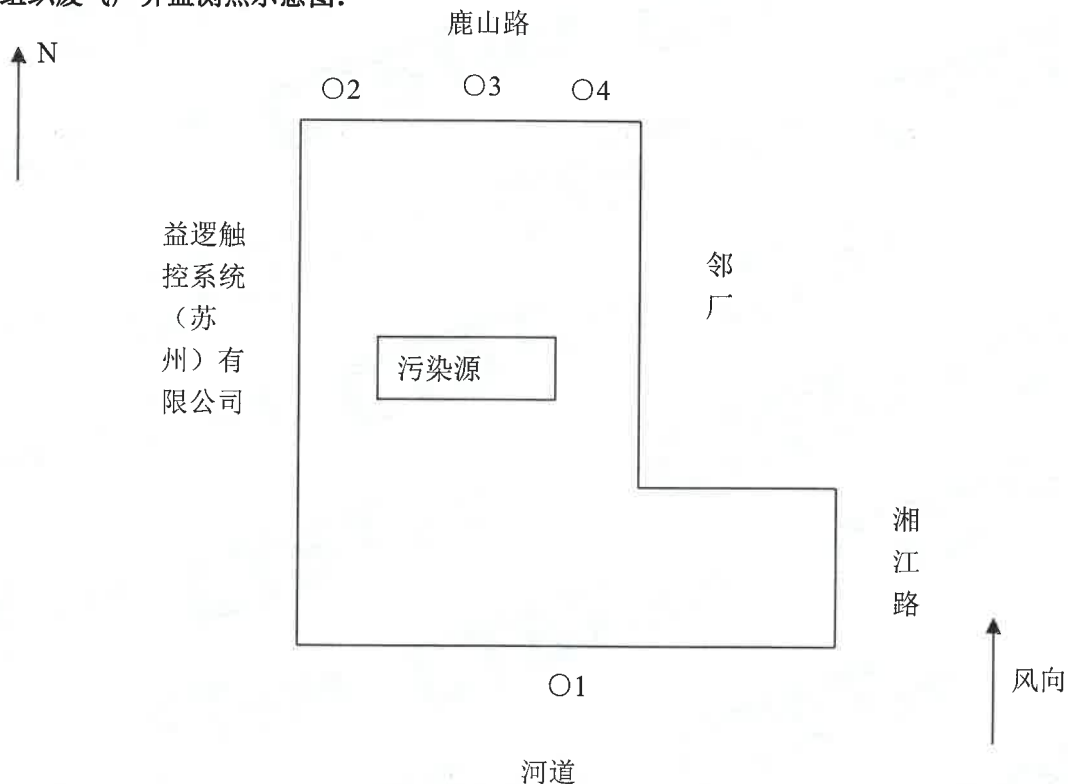

报告结束



161012050711

检测报告

TEST REPORT

委托单位: 苏州阿特斯阳光电力科技有限公司

Client

单位地址: 苏州高新区鹿山路 199 号

Address

检测类别: 验收检测

Type

编制:

Compiled by 张卓 EV

一 审:

Inspected by 杨

二 审:

Inspected by 朱艳菊

批 准:

Approved by T



江苏国测检测技术有限公司

China Test (Jiangsu) Testing Technology CO., Ltd

2018 年 08 月 16 日

Y M D



报告说明

Report Statement

- 1、报告无“检测专用章”或检测单位公章无效。
Report without “Test Dedicated Seal” or without the detection unit official seal is invalidated.
- 2、复制报告未重新加盖“检测专用章”或检测单位公章无效。
Copy report without re-stamped “Test Dedicated Seal” is invalidate.
- 3、报告无编制、审核、批准人签字无效。
Report without compilation, audit and approval signature is invalidated.
- 4、报告涂改无效。
Altered report is invalidated.
- 5、对检测报告若有异议，应于收到报告之日起十日内向检测单位提出，逾期不予受理。
The objections to the inspection report shall be raised to the testing unit within ten days overdue inadmissible.
- 6、本报告检测结果仅对被测地点、对象及当时情况有效，送样委托检测结果仅对所送委托样品有效。
This report is effective only to the inspected location, the object and the particular situation while inspecting, the sample test result is validated only to the commissioned sample.
- 7、除客户特别申明并支付样品管理费，所有超过标准规定时效期的样品均不再做留样。
Only if the client makes particular statement and pays the management fess of the test samples, the rest testing samples will not be kept after exceeding the standard provisions of the limitation period.
- 8、除客户特别申明并支付档案管理费，本次检测的所有记录档案保存期限为六年。
Only if customer makes particular statement and pays the archives management fee, all files or archives related to this inspection report will only be kept up to 6 years.
- 9、部分复印无效。
Part of the copy is invalid .
- 10、客户提供的信息和指定检测内容不符合规范的情况，我司概不负责。
We are not responsible for the information provided by the customer and the specified content that does not conform to the specification.

检测报告

Test Report

受检单位 Applicant	苏州阿特斯阳光电力科技有限公司		
地 址 Address	苏州高新区鹿山路 199 号		
联系人 Contact person	张宇清/13776023359	样品类别 Sample type	噪声
监测人 Mining kind of people	宋晓平、王杰	监测日期 Sampling Date	2018 年 08 月 13 日-2018 年 08 月 14 日
检测目的 Test objective	验收检测		
检测内容 Test content	等效连续 A 声级		
检测仪器 Testing instrument	AWA5688 型多功能声级计 (GCM-53-5)、PH-SD2 手持风速风向仪 (GCM-076)		
检测依据及方法 Test basis and method	GB 12348-2008 《工业企业厂界环境噪声排放标准》		
检测结果 Test Result	详见第 4-6 页		
备 注 Remark	噪声测量值包含环境噪声背景值		

检测报告

Test Report

厂界噪声

天气情况	晴					
执行标准	《工业企业厂界环境噪声排放标准》（GB 12348-2008）3类					
监测时间	2018年08月13日09时06分至09时22分（昼间） 2018年08月13日22时05分至22时20分（夜间）					
主要噪声源情况	噪声源名称	运转状态				备注
		昼间		夜间		
		开（台）	停（台）	开（台）	停（台）	
	风机	6	2	6	2	/
	/	/	/	/	/	/

测点编号	测点位置	主要声源	测点距声源距离 (m)	等效声级 dB (A)		风速 (m/s)		备注
				昼间	夜间	昼间	夜间	
▲N1	东厂界外1米	/	/	62.8	53.7	1.9	2.3	/
▲N2	南厂界外1米	风机	30	60.7	52.7			
▲N3	西厂界外1米	/	/	62.7	52.6			
▲N4	北厂界外1米	/	/	64.3	53.4			
标准限值				≤65	≤55	/	/	

检测报告

Test Report

厂界噪声


天气情况	晴					
执行标准	《工业企业厂界环境噪声排放标准》(GB 12348-2008) 3 类					
监测时间	2018 年 08 月 14 日 10 时 14 分至 10 时 29 分 (昼间) 2018 年 08 月 14 日 22 时 17 分至 22 时 32 分 (夜间)					
主要噪声源情况	噪声源名称	运转状态				备注
		昼间		夜间		
		开 (台)	停 (台)	开 (台)	停 (台)	
	风机	6	2	6	2	/
	/	/	/	/	/	/

测点编号	测点位置	主要声源	测点距声源距离 (m)	等效声级 dB (A)		风速 (m/s)		备注
				昼间	夜间	昼间	夜间	
▲N1	东厂界外 1 米	/	/	62.7	53.1	2.0	2.5	/
▲N2	南厂界外 1 米	风机	30	60.8	52.4			
▲N3	西厂界外 1 米	/	/	62.5	52.2			
▲N4	北厂界外 1 米	/	/	64.3	53.8			
标准限值				≤65	≤55	/	/	

检测报告

Test Report

测点示意图:

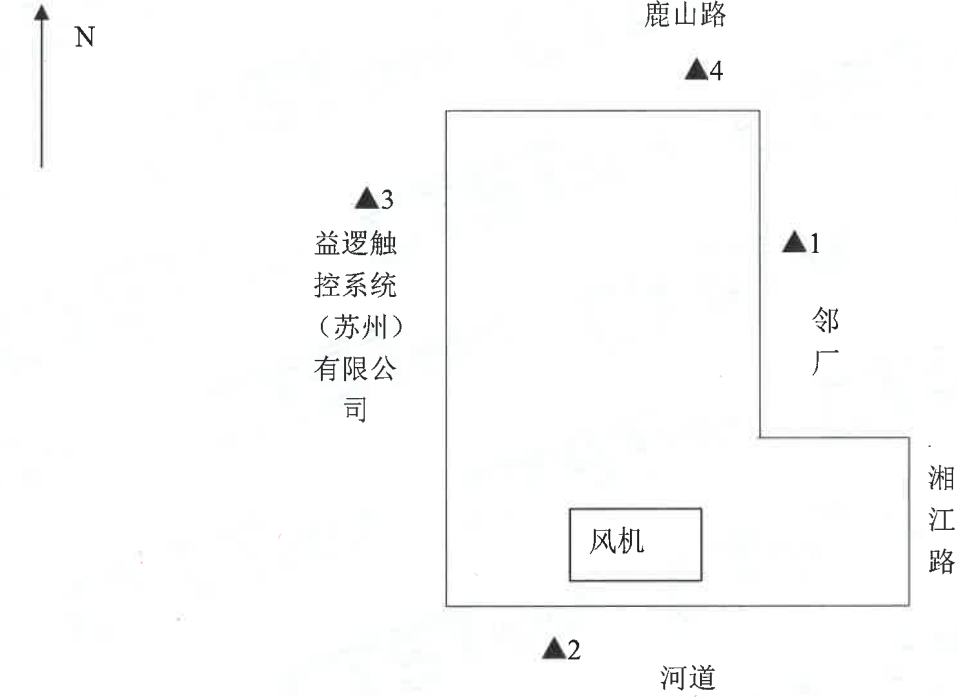

报告结束

检测专用章



检测报告

TEST REPORT

委托单位: 苏州阿特斯阳光电力科技有限公司

Client

单位地址: 苏州高新区鹿山路 199 号

Address

检测类别: 验收检测

Type

编制:

Compiled by 张卓

一审:

Inspected by 李品

二审:

Inspected by 朱艳菊

批准:

Approved by 王

江苏国测检测技术有限公司

China Test (Jiangsu) Testing Technology CO., Ltd

2018 年 08 月 16 日

Y M D

报 告 说 明

Report Statement

- 1、报告无“检测专用章”或检测单位公章无效。
Report without “Test Dedicated Seal” or without the detection unit official seal is invalidated.
- 2、复制报告未重新加盖“检测专用章”或检测单位公章无效。
Copy report without re-stamped “Test Dedicated Seal” is invalidate.
- 3、报告无编制、审核、批准人签字无效。
Report without compilation, audit and approval signature is invalidated.
- 4、报告涂改无效。
Altered report is invalidated.
- 5、对检测报告若有异议，应于收到报告之日起十日内向检测单位提出，逾期不予受理。
The objections to the inspection report shall be raised to the testing unit within ten days overdue inadmissible.
- 6、本报告检测结果仅对被测地点、对象及当时情况有效，送样委托检测结果仅对所送委托样品有效。
This report is effective only to the inspected location, the object and the particular situation while inspecting, the sample test result is validated only to the commissioned sample.
- 7、除客户特别申明并支付样品管理费，所有超过标准规定时效期的样品均不再做留样。
Only if the client makes particular statement and pays the management fess of the test samples, the rest testing samples will not be kept after exceeding the standard provisions of the limitation period.
- 8、除客户特别申明并支付档案管理费，本次检测的所有记录档案保存期限为六年。
Only if customer makes particular statement and pays the archives management fee, all files or archives related to this inspection report will only be kept up to 6 years.
- 9、部分复印无效。
Part of the copy is invalid .
- 10、客户提供的信息和指定检测内容不符合规范的情况，我司概不负责。
We are not responsible for the information provided by the customer and the specified content that does not conform to the specification.

检测报告

Test Report

受检单位 Applicant	苏州阿特斯阳光电力科技有限公司		
地 址 Address	苏州高新区鹿山路 199 号		
联系人 Contact person	张宇清	联系电话 Contact number	13776023359
样品类别 Sample type	废水	采样人 Mining kind of people	宋晓平、王杰、董书敏
采样日期 Sampling Date	2018 年 08 月 11 日-08 月 20 日	分析日期 Analysis Date	2018 年 08 月 11 日-2018 年 08 月 30 日
检测目的 Test objective	验收检测		
检测内容 Test content	总磷、化学需氧量		
检测仪器 Testing instrument	FA1004 电子天平 (EAA-51、194)、HCA-102 标准 COD 消解器 (EAA-25-01、03、04、05)		
检测依据及方法 Test basis and method	悬浮物: GB 11901-1989 水质 悬浮物的测定 重量法 化学需氧量: HJ 828-2017 水质 化学需氧量的测定 重铬酸盐法		
检测结果 Test Result	详见第 4 页		
备 注 Remark	/		

检测报告

Test Report

检测点位 及采样时间	检测频次	检测项目	
		化学需氧量 (mg/L)	悬浮物 (mg/L)
蒸汽冷凝水排 口 2018.08.11	第 1 次	20	14
	第 2 次	21	8
	第 3 次	21	8
	第 4 次	21	14
蒸汽冷凝水排 口 2018.08.12	第 1 次	21	6
	第 2 次	21	5
	第 3 次	24	5
	第 4 次	24	7
备注	/		

报告结束

检测专用章